




DS-2CC192N-IR IR Bullet Camera

- Compact design
- 1/3" SONY Super HAD CCD
- Minimum Illumination: 0.1Lux/F1.2 (0 Lux with IR)
- Auto white balance, auto gain control, electronic shutter control and backlight compensation
- Internal synchronization
- Weather Proof: IP66 standard

Outdoor

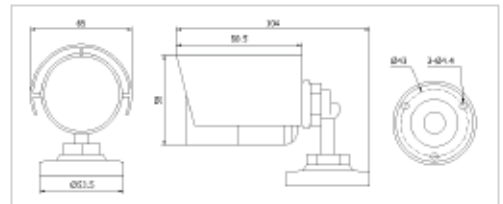

Specifications

		DS-2CC192N-IR
Camera	Image Sensor	1/3" SONY Super HAD CCD
	Signal System	NTSC
	Effective Pixels	768 (H) × 494 (V)
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON), 0 Lux with IR 0.2 Lux @ (F1.8, AGC ON), 0 Lux with IR
	Shutter Time	NTSC: 1/60 s to 1/100,000 s
	Lens	3.6mm @ F1.8 Angle of view: 78°
	Lens Mount	M12
	Day & Night	Electronic
	Horizontal Resolution	540 TVL
	Synchronization	Internal synchronization
	Video Output	1Vp-p composite output (75Ω /BNC)
S/N Ratio	More than 48 dB	
BLC	On	
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
	Power Supply	12 V DC ± 10%
	Power Consumption	Max. 3 W
	Weather Proof Rating	IP66
	IR Range	30 feet
	Dimension (Dia.xH)	Φ 65 × 104 mm (φ 2.56" × 4.09")
	Weight	250 g (0.55 lbs)