




DS-2CC592N Dome Camera

- Compact design
- 1/3" SONY HAD CCD
- Day/night with auto switch
- Min. Illumination: 0.1Lux@F1.2, color to B/W auto switch
- Auto white balance, auto gain control, electronic shutter control and backlight compensation

Indoor



Unit: mm

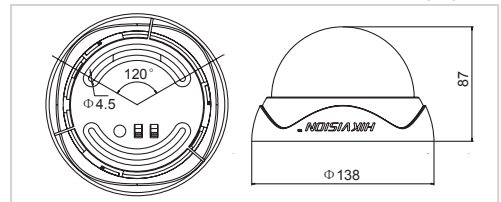

Specifications

		DS-2CC592N
Camera	Image Sensor	1/3" SONY HAD CCD
	Signal System	NTSC
	Effective Pixels	768(H) × 494 (V)
	Min. Illumination	0.1 Lux @ (F1.2, AGC ON) 0.28 Lux @ (F2.0, AGC ON)
	Shutter Time	NTSC: 1/60 s to 1/100,000 s
	Lens	3.6 mm @ F2.0 Angle of view: 78°
	Lens Mount	M12
	Angle Adjustment	Pan: 0 - 120°; Tilt: 0 - 75°
	Day & Night	Electronic
	Horizontal Resolution	540 TVL
	Synchronization	Internal synchronization
	Video Output	1 Vp-p composite output (75 Ω/BNC)
	S/N Ratio	More than 48 dB
BLC	On	
General	Operating Conditions	-10 °C - 60 °C (14 °F - 140 °F) Humidity 90% or less (non-condensing)
	Power Supply	12 V DC ± 10%
	Power Consumption	Max. 2 W
	Dimension (Dia.xH)	Φ 138 x 87 mm (φ 5.43" x 3.43")
	Weight	380 g (0.84 lbs)