

## GP5000

GP SERIES  
Commercial/Residential  
Portable Generators

1 of 2

A/C Rated Output Watts 5,000  
A/C Maximum Output Watts 6,250

### Model 5622-0

UPC Number: 696471056228

Emissions Certification: Not for sale in  
California or Canada



## features

- OHV SPLASH LUBRICATION
- HIGH PERFORMANCE ALTERNATOR
- STEEL FUEL TANK WITH FUEL GAUGE
- LOCKING FOLD-DOWN HANDLES
- NEVER-FLAT WHEEL KIT
- HARDENED STEEL TUBE CRADLE
- HOUR METER WITH MAINTENANCE RESETS
- CIRCUIT BREAKER PROTECTED OUTLETS
- LOW TONE MUFFLER

## customer connections

### Receptacles


A	(4) 5-20R 120V
B	L14-30R Twist-Lock 120/240V

### Circuit Breakers

M	(2) 20A
N	(2) 25A

### Other Features

H	Hour Meter with Maintenance Reset
---	--------------------------------------

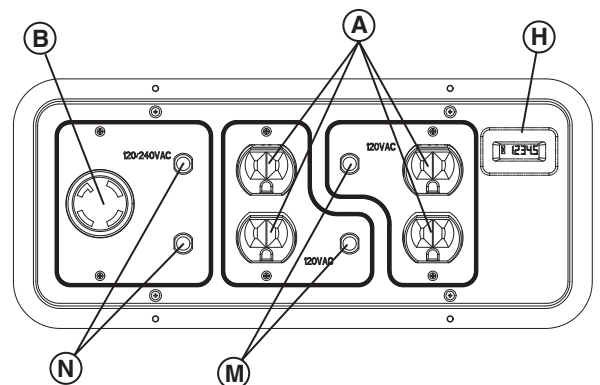

# GP5000

## specifications

Series	GP5000
Model	5622-0
Configuration/Emissions	49-State
A/C Rated Output Watts:	5000
A/C Maximum Output Watts:	6250
A/C Voltage	120/240VAC
A/C Frequency	60 Hz
Rated 120/240 VAC Amperage	20.8
Max 120/240 VAC Amperage	26.0
Engine Size	389cc
Engine Type	OHV
Engine RPM	3600
Recommended Oil	5W30
Lubrication Method	Splash Sump
Choke Type	Manual Lever
Fuel Shut Off	Manual Lever
Idle Control	Full Speed
Starting Method	Manual
Battery	na
Battery Size	na
Low Oil Shutdown Method	Low Level

Start Switch Type	3-Position
Switch Location	On Engine
Single-Point Lifting Eye	No
Fuel Gauge	Yes
Fuel Tank Capacity (Gal)	6.6
Fuel Tank Capacity (Liters)	24.981
Run Time at 50% (Hours)	10
Cord Set	No
Handle Style	Folding Interlocked
Wheel type	9.5" Solid Wheels
Maintenance Kit	Sold Separately
Warranty - Residential	2 Year
Warranty - Commercial	1 Year

## dimensions and weights

Length (L)	33.5
Width (W)	26.5
Height (H)	27.5
Extended Length (EL)	47
Carton Length	35.5
Carton Width	26.5
Carton Height	27.5
Unit Weight	0
Shipping Weight (lbs)	180

